


Linear LED High Bay Light (130lm/W)

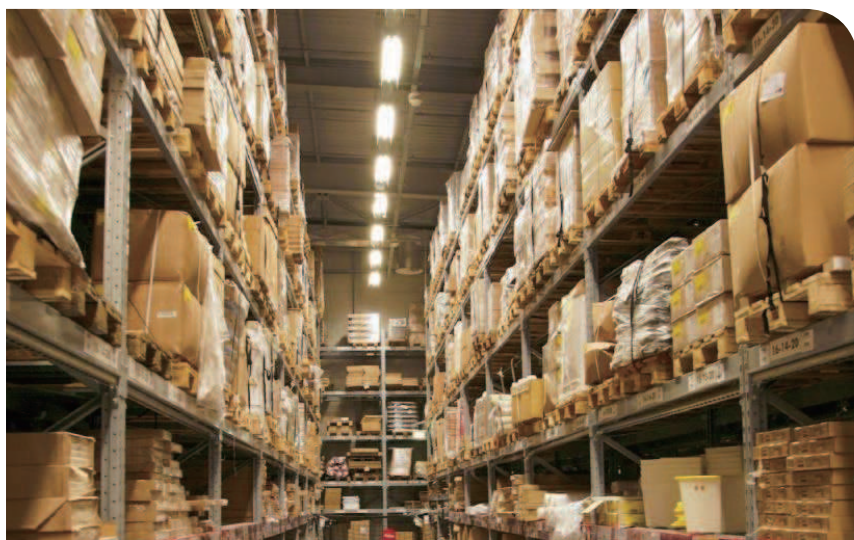

FEATURES

- Outstanding 130lm/w with Philips 3030SMD
- High quality Meanwell and SOSEN power driver optional
- Individual modularized design with perfect thermal dissipation and easy maintenance
- Connectable linear design offering more versatile lighting solution
- Robust IP65 for industrial use
- 5 types of beam angle solution for varying industrial applications
- 2 ways of installation(surface mount, suspension) for varying project application
- Silver and black housing color optional


APPLICATIONS

- Warehouse, workshop, sport venue, supermarket, high ceiling corridor, etc.

SIZE in mm





LIGHT DISTRIBUTION CURVE

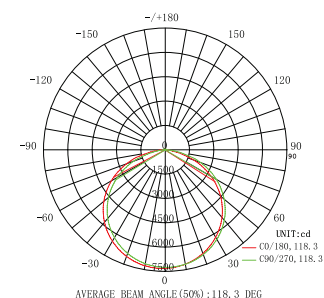

Item No.	Power	Input Voltage	Lumen Flux	Housing Color	Product weight	Product size (L*W*H)	Packing CTN size (1pc/CTN)
IV-HBL-50W	50W	AC100-277V	6,500lm±5%	Black	2kg	350*115*144mm	385*165*195mm (2.5kg)
IV-HBL-100W	100W	AC100-277V	13,000lm±5%	Black	3kg	620*115*144mm	655*165*195mm (3.8kg)
IV-HBL-150W	150W	AC100-277V	19,500lm±5%	Black	4.2kg	887*115*144mm	920*165*195mm (5kg)
IV-HBL-200W	200W	AC100-277V	26,000lm±5%	Black	5.5kg	1154*115*144mm	1185*165*195mm (6.5kg)
IV-HBL-250W	250W	AC100-277V	32,500lm±5%	Black	6.5kg	1421*115*144mm	1450*165*195mm (7.5kg)
IV-HBL-300W	300W	AC100-277V	39,000lm±5%	Black	8.5kg	947*230*173mm	920*280*220mm (10kg)
IV-HBL-400W	400W	AC100-277V	52,000lm±5%	Black	11kg	1214*230*173mm	1185*280*220mm (12.5kg)
IV-HBL-500W	500W	AC100-277V	65,000lm±5%	Black	13kg	1481*230*173mm	1450*280*220mm (14.5kg)

CCT: 3000K/4000K/6500K

New Plastic IP65 LED Triproof Light (130lm/W)

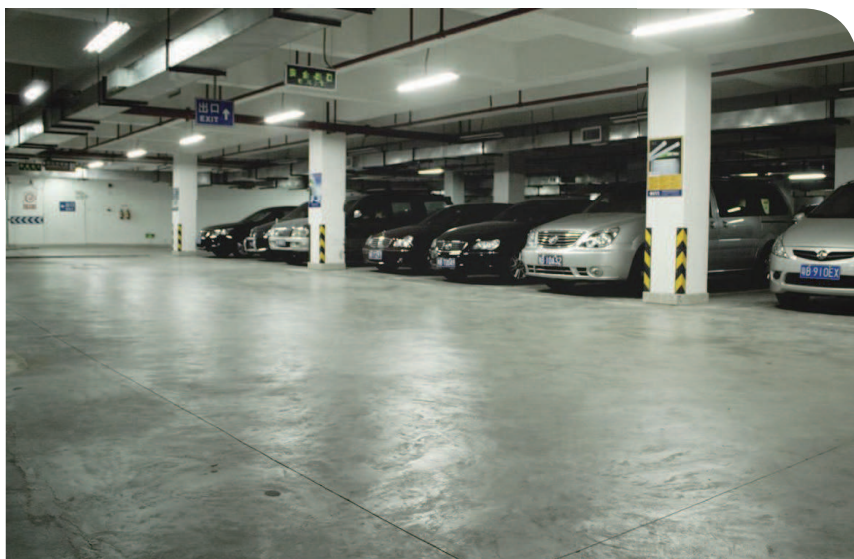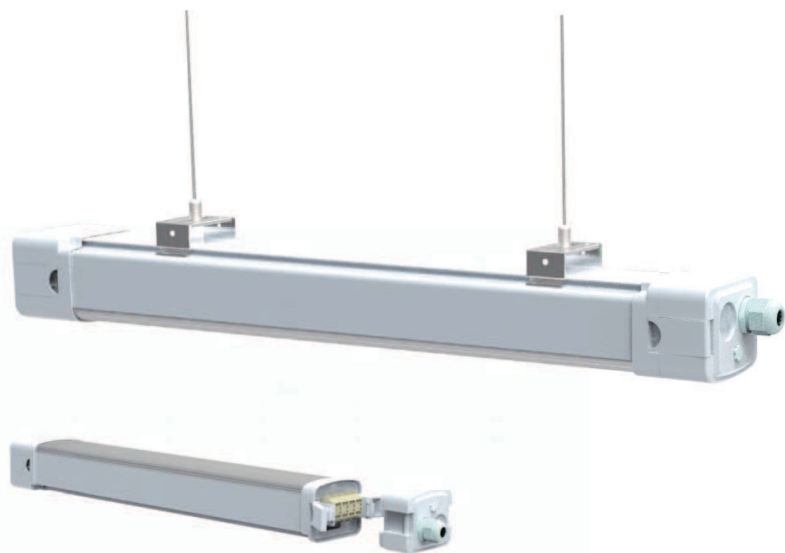


FEATURES

- Robust all in one PC housing with smart easy wiring end cap design
- High efficacy 130lm/w, 80Ra
- High performance 2835SMD
- High quality BOKE ENEC approved flicker free power driver
- IP65 and IK08 robust design for industrial use
- Effective built-in aluminum radiator for quick heat management
- Ceiling mount and suspension installation optional


APPLICATIONS

- Warehouse, cold room, workshop, parking lot, damp location, ect

SIZE in mm



LIGHT DISTRIBUTION CURVE

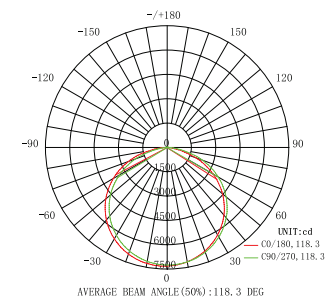

Item No.	Power	Input Voltage	Lumen Flux	Product weight	Product size	Packing CTN size
IV-TPN-20W	20W	AC200-240V	2,600lm±5%	1.1kg	600*83*68mm	720*290*260mm (9pcs/CTN, 10.5kg)
IV-TPN-30W	30W	AC200-240V	3,900LM±5%	1.8kg	900*83*68mm	1020*290*260mm (9pcs/CTN, 15.5kg)
IV-TPN-40W	40W	AC200-240V	5,200LM±5%	2.3kg	1200*83*68mm	1320*290*260mm (9pcs/CTN, 20.5kg)
IV-TPN-50W	50W	AC200-240V	6,500LM±5%	3kg	1500*83*68mm	1620*290*260mm (9pcs/CTN, 27.5kg)
IV-TPN-60W	60W	AC200-240V	7,800LM±5%	3kg	1500*83*68mm	1620*290*260mm (9pcs/CTN, 27.5kg)

CCT: 3000K/4000K/4500K/6000K

Round Plastic IP65 LED Triproof Light (130lm/W)




FEATURES

- Decent round PC housing with smart easy wiring end cap design
- High efficacy 130lm/w, 80Ra
- High performance 2835SMD
- High quality BOKE ENEC approved flicker free power driver
- IP65 and IK08 robust design for industrial use
- Effective built-in aluminum radiator for quick heat management
- Ceiling mount and suspension installation optional


APPLICATIONS

- Warehouse, cold room, workshop, parking lot, damp location, ect

SIZE in mm





LIGHT DISTRIBUTION CURVE



Item No.	Power	Input Voltage	Lumen Flux	Product weight	Product size	Packing CTN size
IV-TPR-20W	20W	AC200-240V	2,600lm±5%	0.9kg	600*D79mm	680*300*350mm (9pcs/CTN, 8kg)
IV-TPR-30W	30W	AC200-240V	3,900LM±5%	1.4kg	900*D79mm	980*300*350mm (9pcs/CTN, 12kg)
IV-TPR-40W	40W	AC200-240V	5,200LM±5%	1.8kg	1200*D79mm	1280*300*350mm (9pcs/CTN, 16kg)
IV-TPR-50W	50W	AC200-240V	6,500LM±5%	2.3kg	1500*D79mm	1580*300*350 (9pcs/CTN, 20kg)
IV-TPR-60W	60W	AC200-240V	7,800LM±5%	2.3kg	1500*D79mm	1580*300*350 (9pcs/CTN, 20kg)

CCT: 3000K/4000K/4500K/6000K

Aluminum LED Triproof Light (110lm/W)



FEATURES



- High efficacy 110lm/w, 80Ra
- High performance Epistar chip 2835SMD
- High quality UL or TUV approved power driver
- IP65 and IK08 robust design for industrial use
- Outstanding aluminum heat sink design delivering effective heat transfer
- Clear and milky lens optional

APPLICATIONS

- Warehouse, cold room, workshop, parking lot, damp location, etc.

LIGHT DISTRIBUTION CURVE

SIZE in mm

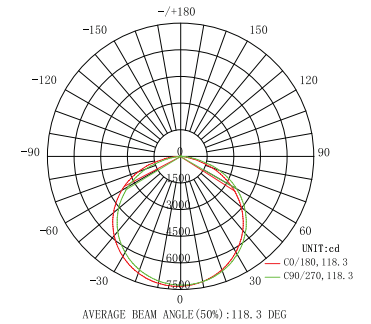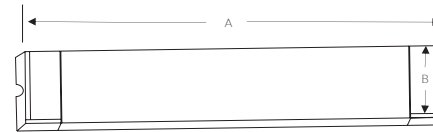

Item No.	Power	Input Voltage	Lumen Flux	Product weight	Product size	Packing CTN size
IV-TPM-30W	30W	AC200-240V	3,300lm±5%	1.5kg	588*88*75mm	680*260*300mm (6pcs/CTN)
IV-TPM-40W	40W	AC200-240V	4,400LM±5%	2.5kg	1198*88*75mm	1280*260*300mm (6pcs/CTN)
IV-TPM-60W	60W	AC200-240V	6,600LM±5%	3.2kg	1498*88*75mm	1580*260*300mm (6pcs/CTN)
IV-TPM-80W	80W	AC200-240V	8,800LM±5%	3.5kg	1498*88*75mm	1580*260*300mm (6pcs/CTN)

CCT: 3000K/4000K/5000K/6000K

LED Street Light (130lm/W)



Photocell


FEATURES

- Sleek smart design with outstanding 130lm/w
- High performance Philips 3030SMD
- High reliable Meanwell XLG and SOSEN power driver optional
- 30 degree rotatable pole adaptor to adjust lighting direct
- Tool free openable back cover for easy maintenance
- Tough A1070 aluminum housing ensuring effective heat dissipation
- Robust IP66 for industrial use
- Surge Protection 6KV for SOSEN driver and 4KV for Meanwell driver (20KV SPD optional)
- Smart photocell function optional


APPLICATIONS

- Roadway, High way, pedestrian road, parking lot

SIZE in mm



LIGHT DISTRIBUTION CURVE

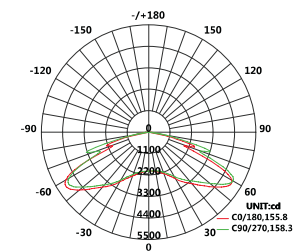

AVERAGE BEAM ANGLE(50%):157.1 DEG



Item No.	Power	Input Voltage	Lumen Flux	Product weight	Product size	Packing CTN size
IV-SLK-50W	50W	AC100-277V	6,500lm±5%	4kg	436×200×32mm	560*230*140mm
IV-SLK-80W	80W	AC100-277V	10,400lm±5%	4.2kg	436×200×32mm	560*230*140mm
IV-SLK-100W	100W	AC100-277V	13,000lm±5%	5kg	490×233×32mm	610*260*140mm
IV-SLK-150W	150W	AC100-277V	19,500lm±5%	5.2kg	490×233×32mm	610*260*140mm
IV-SLK-200W	200W	AC100-277V	26,000lm±5%	6.6kg	553×260×35mm	660*290*140mm

CCT: 3000K/4000K/5000K/6500K

LED Shoebox Light (130lm/W)




FEATURES


- Elegant design with outstanding 130lm/w
- High performance Philips 3030SMD
- High quality Meanwell and SOSEN power driver optional
- Smart Modularized and quality ADC12 aluminum housing
- Robust IP66 with internal power driver box design, easy for maintenance
- Asymmetric 80°*120° beam angle for roadway, parking lot lighting
- Available in smart photocell sensor function

APPLICATIONS

- Roadway, high way, pedestrian road, parking lot, garden etc.

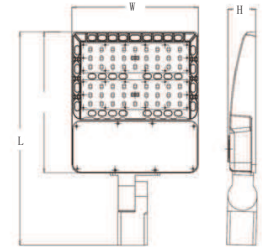


LIGHT DISTRIBUTION CURVE

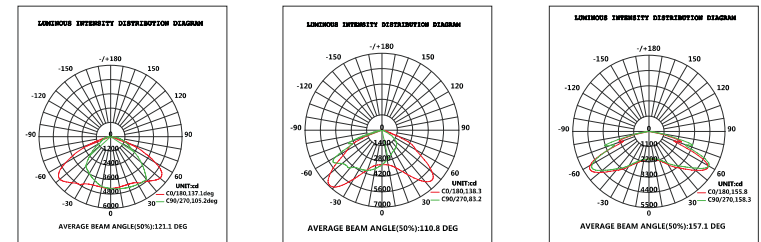

Item No.	Power	Input Voltage	Lumen Flux	Housing Color	IP rating	Product weight	Product size
IV-SLH-80W	80W	AC100-277V 50/60Hz	10,400lm±5%	Bronze	IP66	6kg	535*316*70mm
IV-SLH-100W	100W	AC100-277V 50/60Hz	13,000lm±5%	Bronze	IP66	6.3kg	535*316*70mm
IV-SLH-150W	150W	AC100-277V 50/60Hz	19,500lm±5%	Bronze	IP66	6.6kg	535*316*70mm
IV-SLH-200W	200W	AC100-277V 50/60Hz	26,000lm±5%	Bronze	IP66	8.5kg	626*316*70mm
IV-SLH-240W	240W	AC100-277V 50/60Hz	31,200lm±5%	Bronze	IP66	8.7kg	626*316*70mm
IV-SLH-300W	300W	AC100-277V 50/60Hz	39,000lm±5%	Bronze	IP66	9.7kg	710*316*70mm

CCT: 3000K/4000K/6500K Beam Angle: 80° 120°, 105° 150°, 120° 160°

LED Street Light (150lm/W)

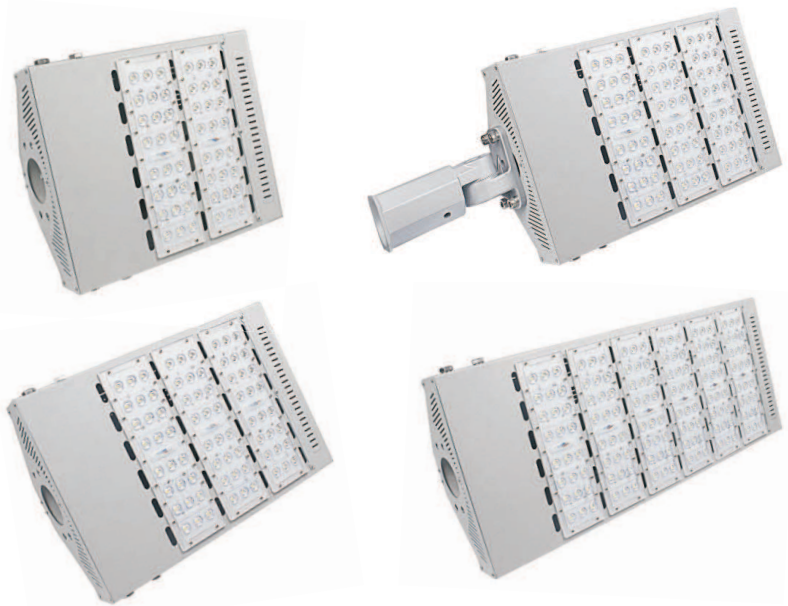

FEATURES

- Outstanding 150lm/w with optimized lens
- High performance Philips 3030SMD
- High quality Meanwell and SOSEN driver optional
- Stylish design with effective heat sink
- Robust IP65 & IK08 rated for industrial use
- 180°rotatable arm pole adaptor optional




Rotatable Pole Adaptor


APPLICATIONS

- Roadway, High way, pedestrian road, parking lot, etc.

SIZE in mm



LIGHT DISTRIBUTION CURVE

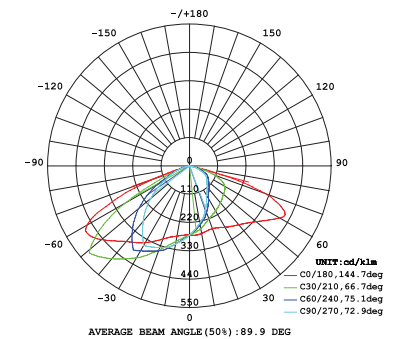

Item No.	Power	Input Voltage	Lumen Flux	Product weight	Product size	Packing CTN size
IV-SLE-60W-S	60W	AC100-277V	9,000lm±5%	3.5kg	L360*W317*D133mm	L425*W395*D180mm (4.5kg)
IV-SLE-80W-S	80W	AC100-277V	12,000lm±5%	3.5kg	L360*W317*D133mm	L425*W395*D180mm (4.5kg)
IV-SLE-120W-S	120W	AC100-277V	18,000lm±5%	4kg	L452*W317*D133mm	L515*W395*D180mm (5kg)
IV-SLE-160W-S	160W	AC100-277V	24,000lm±5%	4.5kg	L544*W317*D133mm	L610*W395*D180mm (5.5kg)
IV-SLE-200W-S	200W	AC100-277V	30,000lm±5%	5.5kg	L636*W317*D133mm	L700*W395*D180mm (6.5kg)
IV-SLE-250W-S	250W	AC100-277V	37,500lm±5%	7kg	L728*W317*D133mm	L795*W395*D180mm (8kg)
IV-SLE-280W-S	280W	AC100-277V	42,000lm±5%	8.5kg	L820*W317*D133mm	L885*W395*D180mm (9.5kg)

CCT: 3000K/4000K/6500K

LED Street light (S Series 130lm/W)




FEATURES

- Outstanding 130lm/w
- Ultra brightness Philips 3030SMD
- High performance Meanwell HLG series or SOSEN power driver
- Slimline and high cost effective design
- Robust IP65 & IK08 rated for industrial use
- Asymmetric 85°x140° beam angle for roadway lighting

APPLICATIONS

- Roadway, High way, pedestrian road, parking lot, etc

SIZE in mm

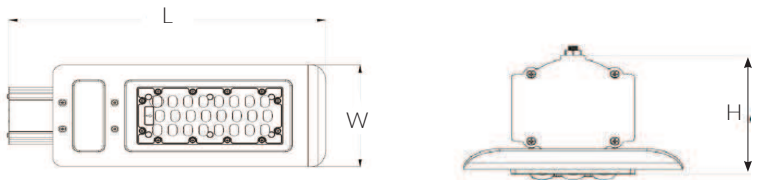


Model No.	Power	Input Voltage	Lumen Flux	Equivalent to conventional HPS light	Product weight	Product size	Packing CTN size
IV-SLS-30W	30W	AC100-277V 50/60Hz	3,900lm±10%	80W (4,000lm)	1.3kg	315*135*90mm	42*19*15cm (1pc/CTN, 1.5kg)
IV-SLS-40W	40W	AC100-277V 50/60Hz	5,200lm±10%	100W (5,000lm)	1.5kg	366*135*90mm	42*19*15cm (1pc/CTN, 1.8kg)
IV-SLS-50W	50W	AC100-277V 50/60Hz	6,750lm±10%	120W (6,000lm)	2kg	432*160*90mm	48*22*15cm (1pc/CTN, 2.5kg)
IV-SLS-60W	60W	AC100-277V 50/60Hz	7,800lm±10%	150W (7,500lm)	2kg	432*160*90mm	48*22*15cm (1pc/CTN, 2.5kg)
IV-SLS-90W	90W	AC100-277V 50/60Hz	11,700lm±10%	250W (12,500lm)	2.5kg	432*160*90mm	48*22*15cm (1pc/CTN, 3kg)
IV-SLS-120W	120W	AC100-277V 50/60Hz	15,600lm±10%	250W (12,500lm)	3.5kg	632*215*90mm	69*27*15cm (1pc/CTN, 4kg)
IV-SLS-150W	150W	AC100-277V 50/60Hz	19,500lm±10%	400W (20,000lm)	5.3kg	632*215*90mm	69*27*15cm (1pc/CTN, 5.8kg)

CCT: 3000K/4000K/6500K





- Decent robust design intended for gas station, garage use
- High performance Philips 3030SMD with 130lm/w
- High quality Meanwell power driver and SOSEN driver optional
- High thermal conductive die-casting AL housing
- Built-in light module, easy maintenance, low maintenance cost
- Direct surface mount and pendant mount installation optional

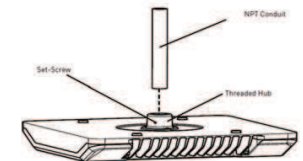

Pendant mount Installation

Gas station, garage, warehouse, etc

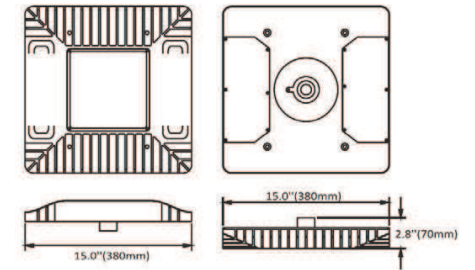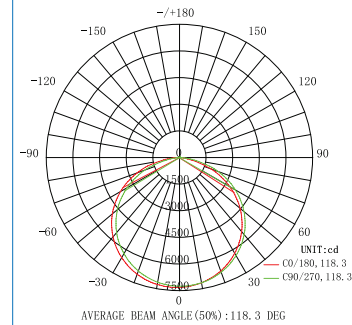

Item No.	Power	Input Voltage	Product size	Lumen Flux	Equivalence	IP rate	Product weight	Packing CTN (1pcs/CTN)
IV-CNP-100W	100W	AC100-277V	380*380*70mm (15inches)	13,000lm±5%	200W HPS	IP65	7.2kg	450*450*150mm (8.2kg)
IV-CPE-150W	150W	AC100-277V	380*380*70mm (15inches)	19,500lm±5%	400W HPS	IP65	7.5kg	450*450*150mm (8.5kg)
IV-CPE-200W	200W	AC100-277V	380*380*70mm (15inches)	26,000lm±5%	400W HPS	IP65	7.8kg	450*450*150mm (8.5kg)

CCT: 3000K/4000K/5000K/5700K

IP65 LED Canopy Light (130lm/W)




FEATURES

- Robust design with polyester powder-coated finish, rust and corrosion proof
- High performance 2835SMD with 130lm/w
- High quality Meanwell power driver and SOSEN driver optional
- High thermal conductive die-casting AL housing
- Built-in light module, easy maintenance, low maintenance cost
- Decent white housing
- 3 Type of installations for different application


APPLICATIONS

- Gas station, garage, warehouse, ect

SIZE in mm

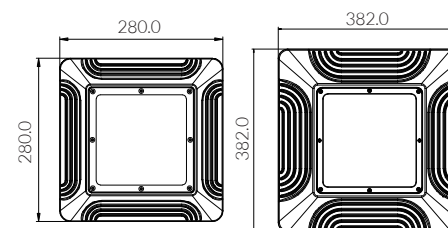


LIGHT DISTRIBUTION CURVE

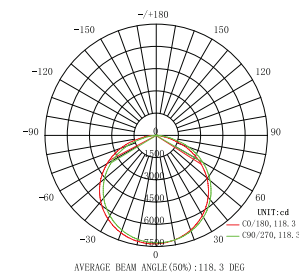

Item No.	Power	Input Voltage	Lumen Flux	Equivalence	Product weight	Material	Product Size
IV-CNPE-60W	60W	AC100-277V	7,500LM±5%	100W HPS	3.8kg	AL housing+ Tempered glass cover	280x280x97mm (surface mount version) 280x280x107mm (recessed version) 280x280x250mm (ceiling mount version)
IV-CNPE-80W	80W	AC100-277V	10,400LM±5%	100W HPS	4kg		
IV-CNPE-100W	100W	AC100-277V	13,000LM±5%	200W HPS	5.2kg	AL housing+ Tempered glass cover	382x382x112mm (surface mount version) 382x382x115mm (recessed version) 382x382x260mm (ceiling mount version)
IV-CNPE-150W	150W	AC100-277V	19,500LM±5%	400W HPS	5.5kg		

CCT: 3000K/4000K/5000K/5700K

LED Tunnel Light (130lm/W)

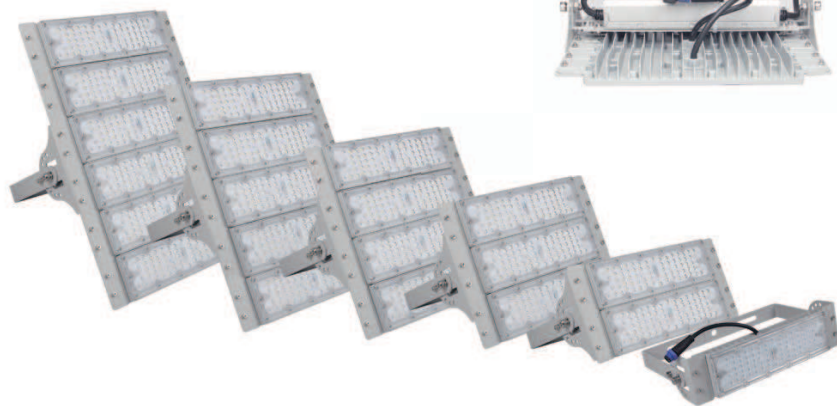


FEATURES

- Outstanding 130lm/w with optimized lens
- High performance Philips 3030SMD
- High Quality Meanwell driver and SOSEN power driver optional
- Endurable ADC12 AL die-casting housing with excellent thermal dissipation
- Robust IP65 rated with electrostatic spraying finishing suitable for harsh environment use
- Asymmetric and symmetric beam angle options for different industrial applications


APPLICATIONS

- Warehouse, workshop, sport venue, supermarket, high ceiling corridor, ect

SIZE in mm

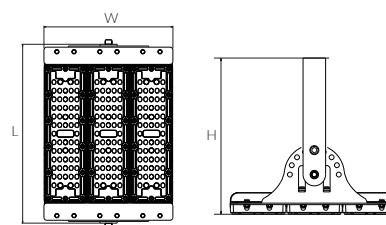

LIGHT DISTRIBUTION CURVE



Item No.	Power	Input Voltage	Lumen Flux	Housing Color	Product weight	Product size (L*W*H)	Packing CTN size
IV-TUL-50W	50W	AC100-277V	6,500lm±5%	Silver Grey	1kg	350*115*144mm	440*330*390mm (10pcs/CTN, 10kg)
IV-TUL-100W	100W	AC100-277V	13,000lm±5%	Silver Grey	2kg	620*115*144mm	380*290*550mm (4pcs/CTN, 9kg)
IV-TUL-150W	150W	AC100-277V	19,500lm±5%	Silver Grey	2.5kg	887*115*144mm	380*328*550mm (4pcs/CTN, 11kg)
IV-TUL-200W	200W	AC100-277V	26,000lm±5%	Silver Grey	3kg	1154*115*144mm	380*366*550mm (4pcs/CTN, 13kg)
IV-TUL-250W	250W	AC100-277V	32,500lm±5%	Silver Grey	3.5kg	1421*115*144mm	435*380*550mm (4pcs/CTN, 15kg)

CCT: 3000K/4000K/6500K

LED Wall Light (130lm/W)



FEATURES



- Outstanding 130lm/w with optimized prism PC cover
- High performance Philips 3030SMD
- High performance Meanwell and SOSEN power driver optional
- Robust IP65 waterproof for industrial use
- Built-in light module, easy maintenance
- Endurable die-casting aluminum housing with electrostatic spraying finishing

APPLICATIONS

- Entrance, Commercial building, Warehouse areas, Residential application, etc

SIZE in mm


LIGHT DISTRIBUTION CURVE

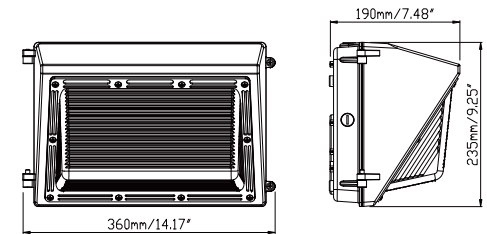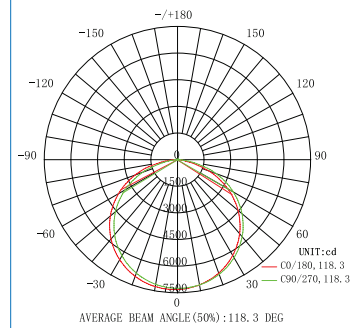

Item No.	Power	Input Voltage	Lumen Flux	Product weight	Product size	Packing CTN size
IV-WP-70W	70W	AC100-277V 50/60Hz	9,100lm±5%	4kg	360x235x187mm	385x260x230mm
IV-WP-100W	100W	AC100-277V 50/60Hz	13,000lm±5%	4.4kg	360x235x187mm	385x260x230mm
IV-WP-120W	120W	AC100-277V 50/60Hz	15,600lm±5%	5kg	360x235x187mm	385x260x230mm
IV-WP-150W	150W	AC100-277V 50/60Hz	19,500lm±5%	5.4kg	360x235x187mm	385x260x230mm

CCT: 4000K/5000K/5700K/6500K

RGB/ RGBW LED Wallwasher

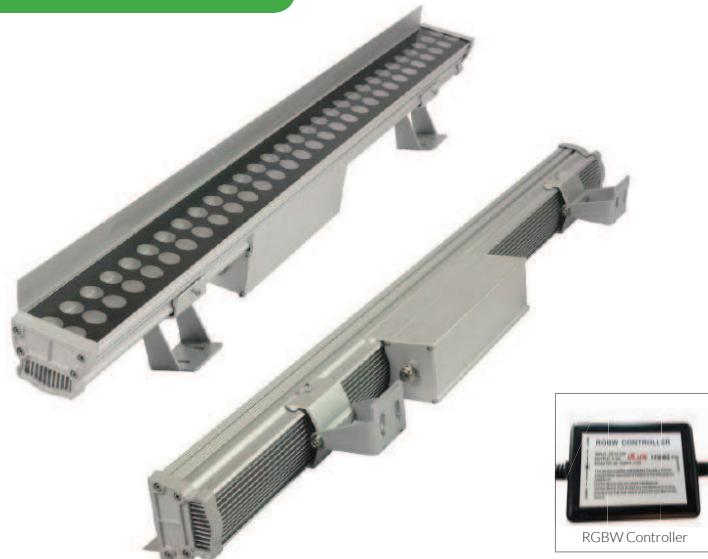


FEATURES

- Elegant linear wallwasher RGB/ RGBW lighting effect
- High performance Epistar chip ceramic base High performance RGB/ RGBW LED
- High quality IP65 external constant 24V power driver
- Smart plug and play design with male and female connector at two ends with 60cm cable
- RGB color change via waterproof RGB controller and remote controller
- Multiple beam angle solution for different project application


APPLICATIONS

- Shopping mall, building facade, hotel, restaurant, etc.

LIGHT DISTRIBUTION CURVE

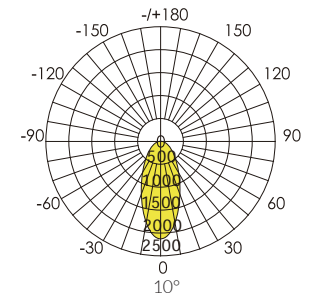

SIZE in mm

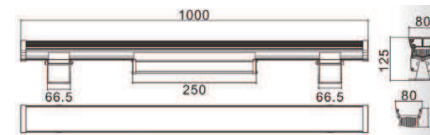

Item No.	Power	Input Voltage	Color	LED quantity	Product weight	Product Size
IV-LWW-36W-RGB	36W	110/220V	RGB	36pcs	4.5kg	L1000*W80*H60
IV-LWW-72W-RGBW	72W	110/220V	RGBW	24pcs/ 72pcs	5kg	L1000*W80*H60



+507 - 6152 2377

info@iportservices.com

Address: 6th floor, Ricardo Arias Street
PH Continental building
Panama, Panama

www.iportservices.com

